

## Features

- Frequency range : 32.768 kHz
- SMD : Ceramic package
- External dimensions (mm)  
L : 3.2 x W : 1.5 x H : 0.75
- RoHS compliant & Pb free


## Applications

- Small mobile devices
- Communication devices
- Consumer products
- Commercial & industrial applications

## Electrical Characteristics

Item	Symbol	9HT10	Conditions
Nominal Frequency	$f_0$	32.768 kHz	
Frequency Tolerance	$\Delta f/f_0$	$\pm 10\text{ppm}$ , $\pm 20\text{ppm}$ , $\pm 30\text{ppm}$ , $\pm 50\text{ppm}$	at 25°C
Load Capacitance	$C_L$	6pF, 7pF, 9pF, 12.5pF	
Operating Temperature Range	$T_{OTR}$	-40°C ~ +85°C	
		-40°C ~ +125°C	
Storage Temperature Range	$T_{STR}$	-55°C ~ +125°C	
Turnover Temperature	$T_M$	25°C $\pm$ 5°C	
Temperature Coefficient	$\beta$	-0.04 ppm/°C <sup>2</sup> Max.	
Motional Capacitance	$C_1$	3.1 fF Typ.	
Motional Resistance (ESR)	$R_1$	70 kΩ Max.	at 25°C
Drive Level	$D_L$	0.1μW Typ. / 1.0μW Max.	
Aging	$\Delta f/f_0$	$\pm 3$ ppm Max.	at 25°C $\pm$ 3°C, first year
Shunt Capacitance	$C_0$	1.0 pF Typ.	

## Dimensions

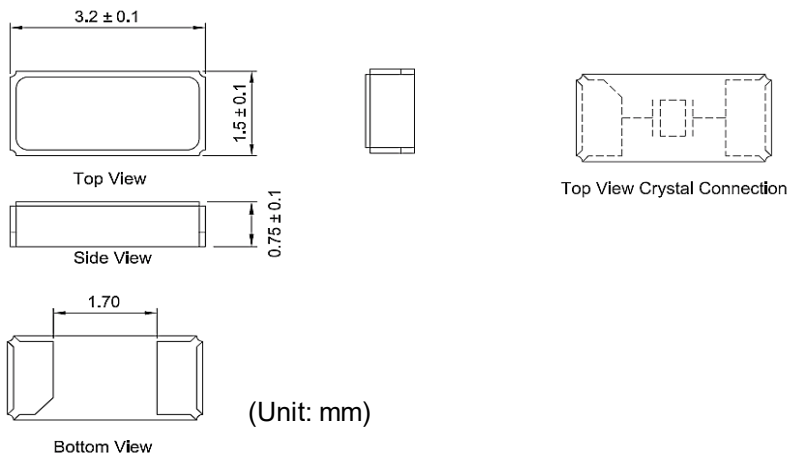

## Ordering Information

**9HT10 - 32.768K D Z F - T**

Frequency Tolerance (at 25°C)		Packaging Method	
B	± 50 ppm	T	Tape & Reel
A	± 30 ppm		
D	± 20 ppm		
E	± 10 ppm		
Operating Temperature Range		Load Capacitance	
Z	-40°C ~ +85°C	B	6 pF
W	-40°C ~ +125°C	Y	7 pF
		C	9 pF
		F	12.5 pF

## Packing

Note:1: P0, Note:2: P2, Do, B, E, F, W, A, P1, D1, B, B0, 5'(max), Ko, B-B SECTION, Ao, 5'(max), A-A SECTION, W, W1, L, L1


Ao = 1.8 ± 0.10 mm  
 Bo = 3.5 ± 0.10 mm  
 Ko = 1.0 ± 0.10 mm

CARRIER TAPE DIMENSIONS		K1	P0	P1	P2	D0	D1	E	F	10P0	W	T
		-	4	4	2	1.55	1.1	1.75	5.5	40	12	0.25

REEL DIMENSIONS		W	W1	L	L1
		16±1.4	13±0.3	180+0/-3	60.2±0.5

(Unit: mm)

## Reflow Profile

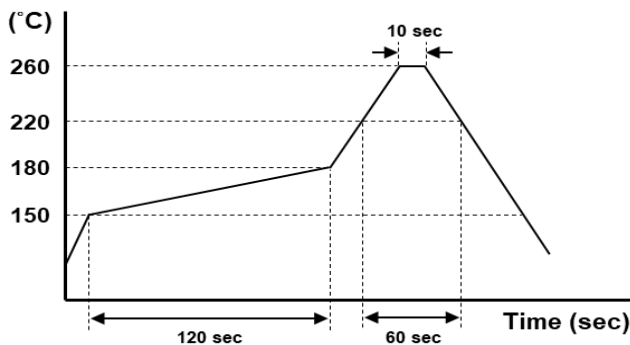

Total time : Max. 200 sec.  
 Solder melting point : 220°C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [TXC Corporation:](#)

[9HT10-32.768KAZF-T](#) [9HT10-32.768KDZC-T](#) [9HT10-32.768KDZF-T](#) [9HT10-32.768KDZY-T](#) [9HT10-32.768KEZF-T](#)  
[9HT10-32.768KBZF-T](#) [9HT10-32.768KAZB-T](#) [9HT10-32.768KAZY-T](#) [9HT10-32.768KAZC-T](#) [9HT10-32.768KBZY-T](#)  
[9HT10-32.768KBZC-T](#) [9HT10-32.768KBZB-T](#) [9HT10-32.768KDZB-T](#) [9HT10-32.768KEZC-T](#) [9HT10-32.768KEZY-T](#)  
[9H03270059](#) [9H03270052](#) [9H03200022](#) [9H03220009](#) [9H03220005](#) [9H03200021](#) [9H03220008](#) [9H03200019](#)  
[9H03270024](#) [9H03270011](#) [9H03277003](#) [9H03200042](#) [9H03200034](#) [9H03200036](#) [9H03277005](#) [9H03200031](#)  
[9H03270042](#) [9H03270040](#) [9H03270036](#)